


JE-Y(St)YT-FR Bd Si

in resemblance to DIN VDE 0815

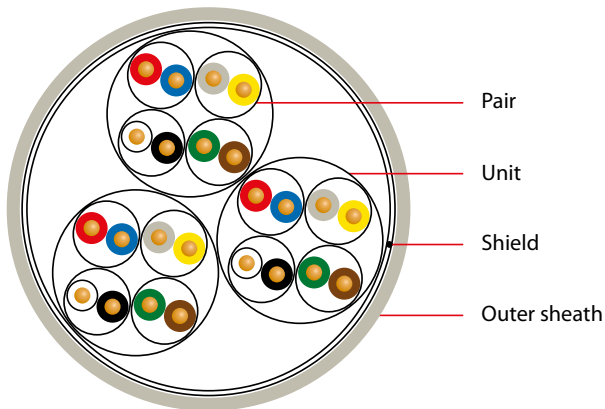

APPLICATION

For information transmission in dry and moist production sites, in and under plaster, as well as outdoors for fixed installation. Not approved for power and underground installation.

CONSTRUCTION

Conductor: copper, solid, bare (\varnothing 0.8 mm)

Core insulation: PVC

Core stranding: 2 cores to pair, 4 pairs to unit, units in layers; 2 x 2 as star quad

Lapping: plastic foil

Shield: tinned drain wire (\varnothing 0.8 mm); plastic-laminated aluminium foil

Outer sheath: PVC-FR; termite protected; colour: pebble grey RAL 7032 or blue RAL 5015

BEHAVIOUR UNDER FIRE CONDITIONS

Fire retardant: IEC 60332-3-22 / 24, DIN EN 60332-3-22 / 24

Low smoke and fume

Dimension	Sheath thickness approx. mm	Diameter approx. mm	Cable weight approx. kg/km	Copper index kg/km
2 x 2 x 0.8	1.0	6.6	55	25
4 x 2 x 0.8	1.0	8.3	87	45
8 x 2 x 0.8	1.0	10.5	146	85
12 x 2 x 0.8	1.0	11.8	200	126
16 x 2 x 0.8	1.2	13.5	270	166
20 x 2 x 0.8	1.2	14.7	325	206
32 x 2 x 0.8	1.4	19.0	510	327
40 x 2 x 0.8	1.4	20.7	610	407

ELECTRICAL CHARACTERISTICS

(Conductor) loop resistance max.	73.2 Ω /km
Insulation resistance min.	100 M Ω x km
Mutual capacitance (800 Hz) max.	100 nF/km 2 and 4 pair cable plus 20% permitted 1 pair 180nF/km
Capacitance unbalance (800 Hz) max.	200 pF/100m 20% of values, min. one value max. 400 pF
Test voltage core-core	500 V 50 Hz 1 min
Test voltage core-screen	2000 V 50 Hz 1 min
Peak operating voltage	225 V

THERMAL & MECHANICAL PROPERTIES

Temperature range during installation	-5°C to +50°C
Temperature range stationary	-30°C to +70°C
Minimum bending radius	10 x diameter

Subject to changes due to technical progress and error



T.K. Kabel oHG · Bahnhofstraße 6 · 71384 Weinstadt

Phone +49 (0) 7151/60 68 70 · Fax +49 (0) 7151/60 91 00 · info@tk-kabel.de · www.tk-kabel.de