


LI6YC6YS-O/J 3 x 2.5

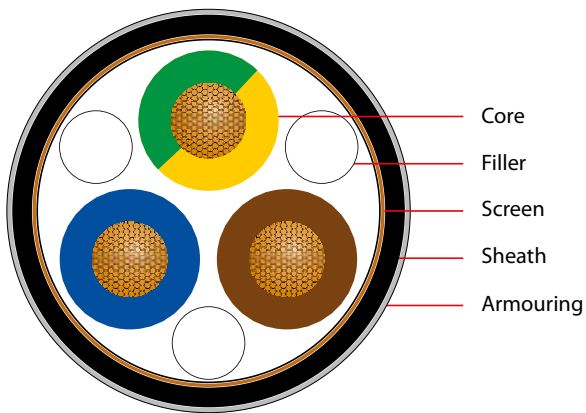

No. of cores and cross section	Diameter approx. mm	Cable weight approx. kg/km	Copper index kg/km
3 x 2.5	8.4	180	101

APPLICATION

- in heat-appliances and fire resistant installations
- wiring of controls and computers with high transfer-speed
- plants in industrial atmosphere
- in the chemical industry

CONSTRUCTION

Conductor: tinned copper strand; 50 x 0.25 mm = 2.5 mm²

Core insulation: FEP; wall thickness 0.3 mm; approx. Ø 2.7 mm

Core identification:

blue, brown, (O) orange or (J) green-yellow

or acc. to customer request

Filler: glass fibre

Lapping: polyester tape

Screen: tinned copper wire braid; optical coverage approx. 85 %

Sheath: FEP; wall thickness 0.5 mm

Armouring: galvanized steel wire braid (Ø 0.2 mm)

ELECTRICAL CHARACTERISTICS

Operating voltage 660 V

Test voltage 3000 V

THERMAL & MECHANICAL PROPERTIES

Operating temperature -90°C to +205°C

Subject to changes due to technical progress and error



T.K. Kabel oHG · Bahnhofstraße 6 · 71384 Weinstadt

Phone +49 (0) 7151/60 68 70 · Fax +49 (0) 7151/60 91 00 · info@tk-kabel.de · www.tk-kabel.de