


## LI7YC7Y n x 2 x 0.5 GY/BU

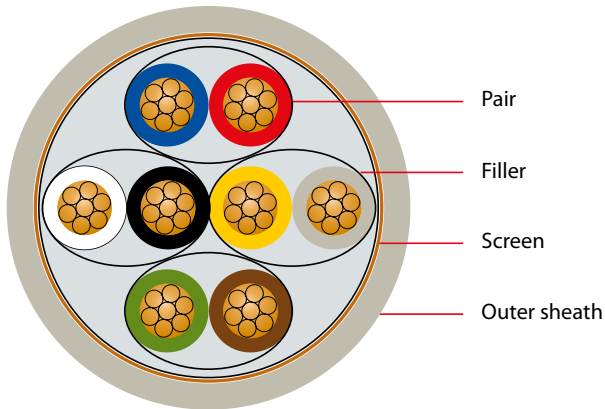

### APPLICATION

- in heat-appliances and fire resistant installations
- in the lighting and automobile sector
- for sensor applications
- plants in industrial atmosphere
- in the chemical industry

### CONSTRUCTION

**Conductor:** tinned copper strand;  $16 \times 0.2 \text{ mm} = 0.5 \text{ mm}^2$

**Core insulation:** ETFE; wall thickness 0.25 mm; approx.  $\varnothing$  1.45 mm

**Core identification:** colours acc. VDE 0815 or customer request  
 12 x 2 x 0.5: black - white, brown - white, green - white, grey - white, blue - white, yellow - white, red - white, black - red, green - red, blue - red, yellow - red, grey - red

**Core stranding:** 2 cores to pair

**Filler:** silicone rubber (round shaping); 12 x 2 x 0.5 without filler

**Screen:** tinned copper wire braid; optical coverage approx. 85 %

**Outer sheath:** ETFE; colour: grey (GY) or blue (BU)

No. of cores and cross section	Sheath thickness approx. mm	Diameter approx. mm	Cable weight approx. kg/km	Copper index kg/km
2 x 2 x 0.5	0.4	6.2	73	30
4 x 2 x 0.5	0.4	7.6	114	55
12 x 2 x 0.5	0.4	11.5	235	116

### ELECTRICAL CHARACTERISTICS

Test voltage	2500 V
Operating capacitance	80 nF/km
Inductance (reference values)	< 1 mH/km

### THERMAL & MECHANICAL PROPERTIES

Operating temperature	-90°C to +155°C
-----------------------	-----------------

Subject to changes due to technical progress and error



T.K. Kabel oHG · Bahnhofstraße 6 · 71384 Weinstadt

Phone +49 (0) 7151/60 68 70 · Fax +49 (0) 7151/60 91 00 · info@tk-kabel.de · www.tk-kabel.de