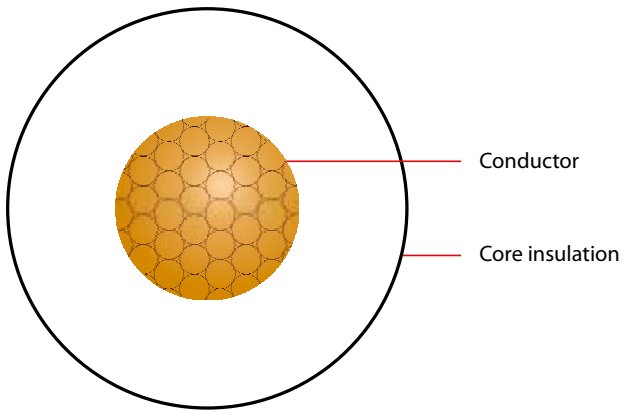


LISOSI 0.75

No. of cores and cross section	Sheath thickness approx. mm	Diameter approx. mm	Cable weight approx. kg/km	Copper index kg/km
1 x 0.75	0.6	2.35	11	7.2

APPLICATION

Flame retardant and halogen-free connecting cable

CONSTRUCTION

Conductor: tinned copper strand; $24 \times 0.2 \text{ mm} = 0.75 \text{ mm}^2$

Core insulation: silicone rubber FRNC

ELECTRICAL CHARACTERISTICS

Operating voltage 300 V
Test voltage 2500 V

THERMAL & MECHANICAL PROPERTIES

Operating temperature -50°C to $+180^\circ\text{C}$

Subject to changes due to technical progress and error



T.K. Kabel oHG · Bahnhofstraße 6 · 71384 Weinstadt

Phone +49 (0) 7151/60 68 70 · Fax +49 (0) 7151/60 91 00 · info@tk-kabel.de · www.tk-kabel.de