


# 02YS(St)CY

acc. to DIN 19245 T3 and EN 50170  
(acc. Profibus specification)

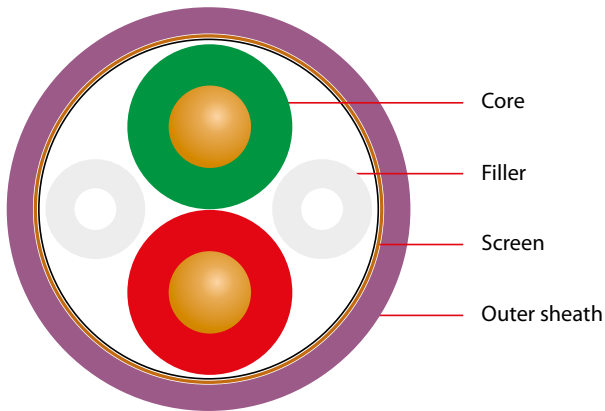

## APPLICATION

The cable can be used as connecting cable in general machinery construction. It is used as a connection cable between bus segments. Cost-efficient plant and machinery wiring is the great advantage of bus technology. Only the information-related component responds to the signal and processes it. The cable is appropriate for indoor installation.

## CONSTRUCTION

**Conductor:** copper wire, solid, bare (AWG 22/1)

**Core insulation:** Foam-Skin PE

**Core identification:** red, green

**Core stranding:** 2 cores and 2 filling cores stranded

**Lapping:** plastic foil

**Screen:** Al/PETP compound foil; tinned copper wire braid; optical coverage approx. 80%

**Outer sheath:** PVC; colour: violet RAL 4001

Dimension	Diameter approx. mm	Cable weight approx. kg/km	Copper index kg/km
1 x 2 x 0.64	7.5	54	25

## ELECTRICAL CHARACTERISTICS

(Conductor) loop resistance max.	115 Ω/km
Insulation resistance min.	1 GΩ x km
Characteristic impedance (3 - 20MHz)	150 ± 15 Ω
Mutual capacitance nom.	30 nF/km
Attenuation max. at	
9.6 KHz	max. 2.5 dB/km
38.4 kHz	max. 4.0 dB/km
4.0 Mhz	max. 22.0 dB/km
16.0 Mhz	max. 42.0 dB/km
Peak operating voltage	250 V
Test voltage	1500 V

## THERMAL & MECHANICAL PROPERTIES

Temperature range stationary	-30°C to +70°C
Minimum bending radius stationary	65 mm

Subject to changes due to technical progress and error



T.K. Kabel oHG · Bahnhofstraße 6 · 71384 Weinstadt

Phone +49 (0) 7151/60 68 70 · Fax +49 (0) 7151/60 91 00 · info@tk-kabel.de · www.tk-kabel.de