


A-Y(St)YSYö-FR Bd Si

in resemblance to DIN VDE 0815

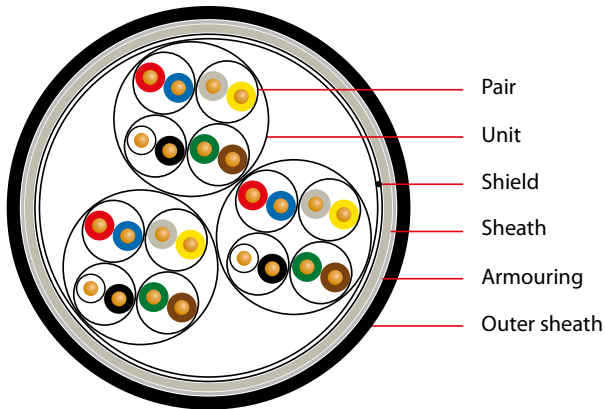

APPLICATION

For information transmission in dry and moist production sites, in and under plaster, as well as outdoors for fixed installation. Not approved for power installation, but appropriate for underground installation. Resistant to impact of oils.

CONSTRUCTION

Conductor: copper, solid, bare (\varnothing 0.8 mm)

Core insulation: PVC

Core stranding: 2 cores to pair, 4 pairs to unit, units in layers; 2 x 2 as star quad

Lapping: plastic foil

Shield: tinned drain wire (\varnothing 0.8 mm); plastic-laminated aluminium foil

Sheath: PVC

Armouring: galvanized steel wire braid (\varnothing 0.24 mm); optical coverage approx. 80 %

Outer sheath: PVC-FR; oil-resistant acc. DIN EN 60811-404, VDE 0473-811-404 edition 2012; colour: black RAL 9005

BEHAVIOUR UNDER FIRE CONDITIONS

Fire retardant: IEC 60332-3-22 / 24, DIN EN 60332-3-22 / 24

Low smoke and fume

Dimension	Sheath thickness approx. mm	Diameter approx. mm	Cable weight approx. kg/km	Copper index kg/km
1 x 2 x 0.8	1.8	10.4	134	15
2 x 2 x 0.8	1.8	11.0	160	25
4 x 2 x 0.8	1.8	12.5	216	45
8 x 2 x 0.8	1.8	15.5	320	85
12 x 2 x 0.8	1.8	16.0	386	126
16 x 2 x 0.8	1.8	17.0	450	166
20 x 2 x 0.8	1.8	19.0	540	206
32 x 2 x 0.8	2.0	24.0	850	327
40 x 2 x 0.8	2.0	26.0	960	407

ELECTRICAL CHARACTERISTICS

(Conductor) loop resistance max.	73.2 Ω /km
Insulation resistance min.	100 M Ω x km
Mutual capacitance (800 Hz) max.	100 nF/km 2 and 4 pair cable plus 20% permitted 1 pair 180nF/km
Capacitance unbalance (800 Hz) max.	200 pF/100m 20% of values, min. one value max. 400 pF
Test voltage core-core	500 V 50 Hz 1 min
Test voltage core-screen	2000 V 50 Hz 1 min
Peak operating voltage	225 V

THERMAL & MECHANICAL PROPERTIES

Temperature range during installation	-5°C to +50°C
Temperature range stationary	-30°C to +70°C
Minimum bending radius	10 x diameter

Subject to changes due to technical progress and error



T.K. Kabel oHG · Bahnhofstraße 6 · 71384 Weinstadt

Phone +49 (0) 7151/60 68 70 · Fax +49 (0) 7151/60 91 00 · info@tk-kabel.de · www.tk-kabel.de