


LISOSI51Y 1 x 1.5

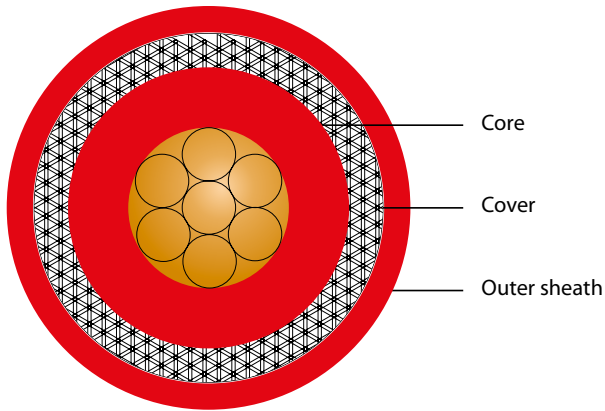

APPLICATION

Ignition lead

CONSTRUCTION

Conductor: tinned copper strand; $48 \times 0.2 \text{ mm} = 1.5 \text{ mm}^2$

Core insulation: notch-tight silicone rubber (2G) FRNC;
approx. \varnothing 5.40 mm

Cover: glass fibre braid

Outer sheath: PFA (51Y); colour: red

No. of cores and cross section	Sheath thickness approx. mm	Diameter approx. mm	Cable weight approx. kg/km	Copper index kg/km
1 x 1.5	0.5	7.0	69	14.4

ELECTRICAL CHARACTERISTICS

Ignition voltage at 50Hz

8 kV eff

Test voltage at 50Hz

15 kV eff

THERMAL & MECHANICAL PROPERTIES

Operating temperature

-50°C to +180°C

Subject to changes due to technical progress and error



T.K. Kabel oHG · Bahnhofstraße 6 · 71384 Weinstadt

Phone +49 (0) 7151/60 68 70 · Fax +49 (0) 7151/60 91 00 · info@tk-kabel.de · www.tk-kabel.de