


THL LI7YC7Y EX IEC n x 2 x 0.75

acc. to DIN IEC 60584

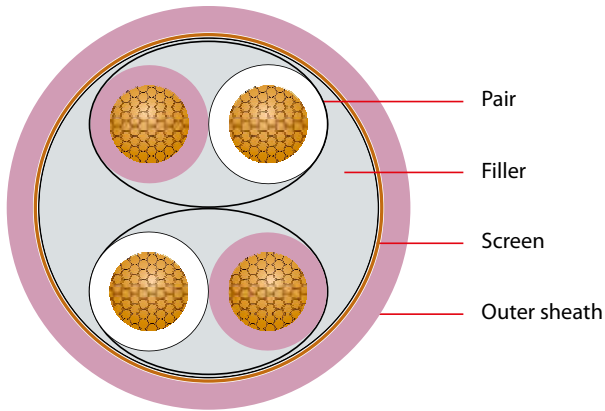

No. of cores and cross section	Sheath thickness approx. mm	Diameter approx. mm	Cable weight approx. kg/km	Copper index kg/km
1 x 2 x 0.75	0.4	4.8	48	13.2
2 x 2 x 0.75	0.4	7.3	99	21.8
3 x 2 x 0.75	0.6	7.7	149	24.3
4 x 2 x 0.75	0.5	8.7	153	33.8
8 x 2 x 0.75	0.6	11.2	306	41

APPLICATION

Thermo extension cable EX for temperature sensors

CONSTRUCTION

Conductor: thermo extension alloy NiCr-CuNi, EX IEC;
24 x 0.2 mm = 0.75 mm²

Core insulation: ETFE, wall thickness 0.25 mm; approx. Ø 1.65 mm

Core identification: purple (+) and white (-),
from 2 x 2 x 0.75: additional pairs with bar code

Lapping: polyester tape

Screen: tinned copper wire braid;
optical coverage approx. 85%

Outer sheath: ETFE; colour: purple

ELECTRICAL CHARACTERISTICS

Test voltage 500 V

THERMAL & MECHANICAL PROPERTIES

Operating temperature -90°C to +155°C

Subject to changes due to technical progress and error



T.K. Kabel oHG · Bahnhofstraße 6 · 71384 Weinstadt

Phone +49 (0) 7151/60 68 70 · Fax +49 (0) 7151/60 91 00 · info@tk-kabel.de · www.tk-kabel.de